

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number:

**0 547 555 A2**

(12)

**EUROPEAN PATENT APPLICATION**(21) Application number: **92121315.3**(51) Int. Cl.<sup>5</sup>: **C08G 73/10, C07C 233/65,  
C07C 69/767, C07C 211/63**(22) Date of filing: **15.12.92**(30) Priority: **16.12.91 US 807348**(43) Date of publication of application:  
**23.06.93 Bulletin 93/25**(84) Designated Contracting States:  
**BE DE ES FR GB IT NL**(71) Applicant: **OCCIDENTAL CHEMICAL  
CORPORATION  
2801 Long Road  
Grand Island New York 14072-1244(US)**(72) Inventor: **Choi, J. O.  
4291 Chestnut Ridge Road, Apt. No. 1  
Amherst, NY 14228(US)  
Inventor: Tyrell, John  
83 East Pinelake Drive  
Williamsville, New York 14221(US)**(74) Representative: **Vossius & Partner  
Siebertstrasse 4 P.O. Box 86 07 67  
W-8000 München 80 (DE)**(54) **Photocrosslinkable polyimide ammonia salts.**

(57) Disclosed is a polyimide ammonium salt comprising the reaction product of an ethylenically unsaturated amine with an aromatic polyimide having pendant carboxylic acid groups, said polyimide comprising the reaction product of diamine and aromatic dianhydride, where the diamine comprises an aromatic carboxylic acid diamine having at least one carboxylic acid. A substrate can be coated with the polyimide ammonium salt by forming a composition of a crosslinking agent and a solution of the polyimide salt in an organic solvent, spreading the composition on the substrate, evaporating the solvent to form a coating, exposing at least some of the coating to actinic radiation to crosslink and insolubilize the exposed portions of the coating, and washing the unexposed portions away by dissolving them in an organic solvent.

**EP 0 547 555 A2****BEST AVAILABLE COPY**

This invention relates to polyimide ammonium salts that are photocrosslinkable. In particular, it relates to novel polyimides having pendant ammonium carboxylate groups that contain ethylenic unsaturation, and to their preparation and use.

Polyimides are used in the semiconductor industry as dielectric coatings on silicon chips. In the conventional process for making the coatings, a substrate is coated with a solution of a photocrosslinkable polyamic acid. The solvent is evaporated and the polyamic acid is crosslinked with actinic light to insolubilize it. The uncrosslinked portions are washed away with solvent and the remaining polyamic acid is heated to imidize it.

In a second method forming a polyimide coating on a silicon chip, a solution of a soluble photocrosslinkable polyimide in an organic solvent is prepared and spread on the substrate. The solvent is evaporated and the polyimide is crosslinked and insolubilized with actinic light. Portions that were not exposed to the light are then washed away with the solvent. In both methods, a diamine containing an ethylenically unsaturation group is used as a monomer in preparing the polyimide to make it photocrosslinkable.


While the two hereinabove described prior methods prepare polyimide coatings, in the method of this invention the coating is a polyimide ammonium salt. Instead of using diamines that contain ethylenic unsaturation, in this invention diamines are used that contain at least one carboxylic acid group. Not only are carboxylic acid diamines more readily available and easier to prepare than diamines containing ethylenic unsaturation, but they cannot crosslink during imidization as can diamines containing ethylenic unsaturation. After the polyimide is prepared, the pendant carboxylic acid groups on the polyimide are reacted with amines that contain ethylenic unsaturation, forming an ammonium carboxylate linkage. The ethylenic unsaturation in the amine crosslinks and insolubilizes the polyimide when it is exposed to actinic radiation.

The polyimides of this invention are prepared by the stoichiometric reaction in solution of aromatic dianhydride with diamine. Examples of suitable aromatic dianhydrides that can be used include:

- 1,2,5,6-naphthalene tetracarboxylic dianhydride;
- 1,4,5,8-naphthalene tetracarboxylic dianhydride;
- 2,3,6,7-naphthalene tetracarboxylic dianhydride;
- 2-(3',4'-dicarboxyphenyl) 5,6-dicarboxybenzimidazole dianhydride;
- 2-(3',4'-dicarboxyphenyl) 5,6-dicarboxybenzoxazole dianhydride;
- 2-(3',4'-dicarboxyphenyl) 5,6-dicarboxybenzothiazole dianhydride;
- 2,2',3,3'-benzophenone tetracarboxylic dianhydride;
- 2,3,3',4'-benzophenone tetracarboxylic dianhydride;
- 3,3',4,4'-benzophenone tetracarboxylic dianhydride (BTDA);
- 2,2',3,3'-biphenyl tetracarboxylic dianhydride;
- 2,3,3',4'-biphenyl tetracarboxylic dianhydride;
- 3,3',4,4'-biphenyl tetracarboxylic dianhydride (BPDA);
- bicyclo-[2,2,2]-octen-(7)-2,3,5,6-tetracarboxylic-2,3:5,6-dianhydride;
- bis (3,4-dicarboxyphenyl) sulfone dianhydride;
- bis (3,4-dicarboxyphenyl) sulfoxide dianhydride;
- bis (3',4'-dicarboxyphenyl) oxadiazole-1,3,4) paraphenylene dianhydride;
- bis (3,4'-dicarboxyphenyl) 2,5-oxadiazole 1,3,4-dianhydride;
- bis 2,5-(3',4'-dicarboxydiphenylether) 1,3,4-oxadiazole dianhydride;
- bis (3,4-dicarboxyphenyl) ether dianhydride or oxydiphthalic anhydride (ODPA);
- bis (3,4-dicarboxyphenyl) thioether dianhydride; bisphenol A bisether dianhydride;
- bisphenol S bisether dianhydride;
- 2,2'-bis (3,4-dicarboxyphenyl) hexafluoropropane dianhydride (6FDA);
- hydroquinone bisether dianhydride;
- bis (3,4-dicarboxyphenyl) methane dianhydride;
- cyclopentadienyl tetracarboxylic acid dianhydride;
- cyclopentane tetracarboxylic dianhydride;
- ethylene tetracarboxylic acid dianhydride;
- perylene 3,4,9,10-tetracarboxylic dianhydride;
- pyromellitic dianhydride (PMDA);
- tetrahydrofuran tetracarboxylic dianhydride; and
- 5,5-[2,2,2-trifluoro-1-(trifluoromethyl)ethylidene] bis-1,3-isobenzofurandione)


Preferred dianhydrides are BTDA, BPDA, PMDA, ODPA, and 6FDA because these dianhydrides are readily available and result in polyimides having good properties. Mixtures of dianhydrides are also contemplated and are useful in obtaining the desired solubility in various solvents.

A polyimidesiloxane can be prepared by replacing a portion of the aromatic dianhydride or the diamine with a siloxane containing dianhydride or a siloxane containing diamine, respectively. It is preferable not to use both a siloxane diamine and a siloxane dianhydride as it unnecessarily complicates preparation of the polyimide. If a siloxane dianhydride is used, up to 80 mole% of the dianhydride that is present may be siloxane dianhydride, and preferably about 10 to about 50 mole% is siloxane dianhydride. Examples of suitable siloxane dianhydrides can be found in U.S. Patent 4,794,153, herein incorporated by reference, and include siloxane dianhydrides having the formula

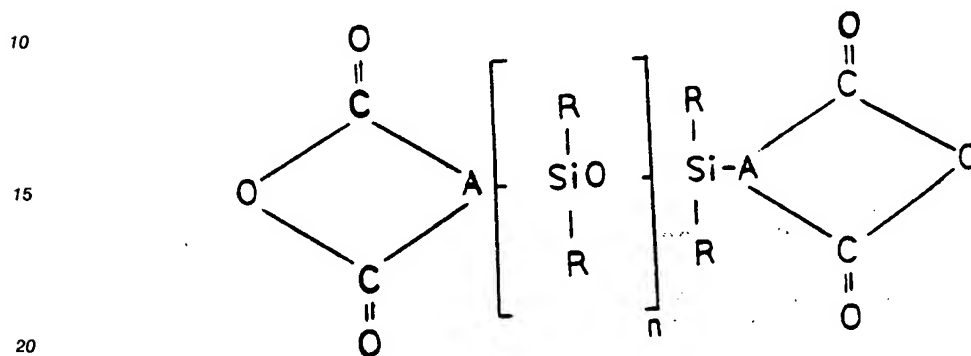


where each A is independently selected from an aromatic group, each R is independently selected from alkyl to C<sub>8</sub>, alkenyl to C<sub>8</sub>, and aryl to C<sub>10</sub>, and n is 1 to 50.

About 0 to about 50 mole% of the diamine in the polymer can be a siloxane diamine. If the diamine is the source of siloxane (rather than the dianhydride), then it is preferable to use about 5 to about 30 mole% siloxane diamine. The siloxane diamine has a general formula

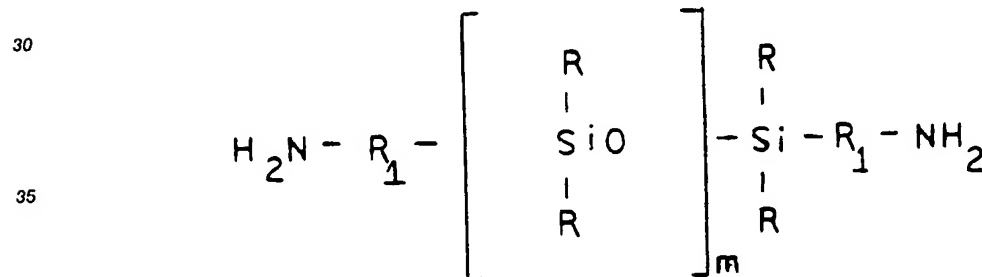


where each R<sub>1</sub> is a diradical independently selected from a substituted or unsubstituted aliphatic group having 1 to 12 carbon atoms or a substituted or unsubstituted aromatic group having 6 to 10 carbon atoms, and m is 1 to 200 and is preferably 1 to 20. These diamines are referred to herein by the designation "G<sub>m</sub>."

About 10 to about 100 mole% of the diamine used to prepare the polyimide, and preferably about 50 to 100 mole%, is an aromatic diamine containing at least one carboxylic acid, but containing no ethylenic unsaturation. Examples of aromatic carboxylic acid diamines include compounds having the formula



where x is 1, 2, or 3, and is preferably 1. More specifically, examples include compounds having the general formula

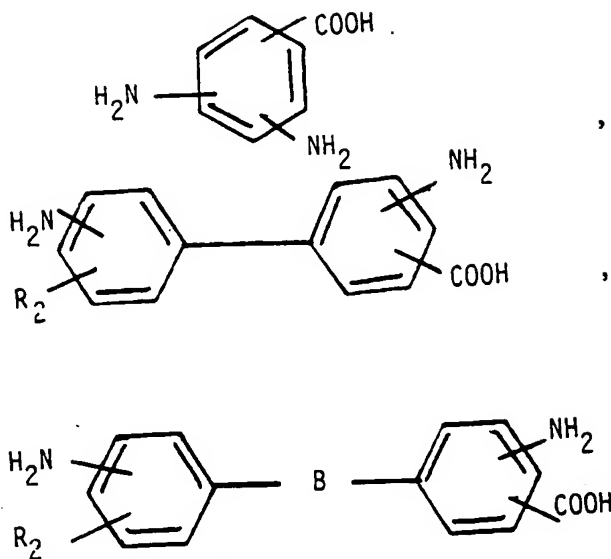

or

where  $\text{R}_2$  is H or  $\text{COOH}$ , and  $\text{B}$  is  $\text{CO}$ ,  $\text{SO}_2$ ,  $\text{S}$ ,  $\text{C}(\text{CH}_3)_2$ ,  $\text{C}(\text{CF}_3)_2$ , or  $\text{CH}_2$ . The preferred carboxylic acid diamine is 3,5-diaminobenzoic acid because it is commercially available and has been found to work well.

In order to reduce the costs of the polymer and obtain good solubility, it may be desirable to use diamines that are aromatic but do not contain siloxane groups or carboxylic acid groups to prepare the polyimide. While up to 80 mole% of the diamine in the polyimide can be this third diamine, it is preferable to use no diamine other than the siloxane diamine and the carboxylic acid diamine as this third diamine tends to diminish the desirable properties of the polyimide. Examples of such diamines that can be used include


- 2,4-diaminotoluene (TDA);
- 2,5-diaminotoluene;
- 2,6-diaminotoluene;
- m-xylyl diamine;
- 2,4-diamine-5-chlorotoluene;
- 2,4-diamine-6-chlorotoluene;
- 2,2-bis(4[4-aminophenoxy]phenyl) propane (BAPP);
- trifluoromethyl-2,4-diaminobenzene;
- m-phenylenediamine;
- p-phenylenediamine;
- 2,2'-bis(4-aminophenyl)-hexafluoropropane (6F diamine);
- 2,2-bis (4-phenoxy aniline) isopropylidene;
- trifluoromethyl-2,4-diaminobenzene;
- trifluoromethyl-3,5-diaminobenzene;
- 2,4,6-trimethyl-1,3-diaminobenzene;
- 3,4'-oxydianiline;
- 4,4'-oxydianiline (ODA);
- m,m-methylene dianiline;
- m,m-sulfone dianiline;
- 4,4'-diamino-2,2'-trifluoromethyl-diphenyloxide;
- 3,3'-diamino-5,5'-trifluoromethyl diphenyloxide;
- 4,4'-trifluoromethyl-2,2'-diamino biphenyl;
- 2,4,6-trimethyl-1,3-diaminobenzene;
- o,m-sulfone dianiline; and
- diaminoanthraquinone.

The preferred diamines are 6F diamine, BAPP, TDA, and ODA because they are readily available and work well.

Any solvent that will dissolve both the monomers and the polyimide can be used to form a solution of the monomers. Examples of solvents that may be suitable include N-methyl pyrrolidone (NMP), diglyme, triglyme, dimethylformamide, and methyl ethyl ketone. The preferred solvent is NMP because it solubilizes

many polyimides. A polyimide can be prepared by forming a solution, preferably about 10 to about 35 wt% solids, of stoichiometric quantities of diamine and dianhydride and heating to about 140 to about 170 °C for about 1 to about 4 hours.

The polyimide ammonium salt is prepared by mixing the polyimide with an ethylenically unsaturated amine. The pendant carboxylic acid groups on the polyimide react stoichiometrically with the amine and it is preferable to use an equivalent amount of amine. The reaction between the carboxylic acid groups and the ethylenically unsaturated amine is immediate and occurs at room temperature. Preferred ethylenically unsaturated amines have the formula



where  $\text{R}_3$  is an ethylenically unsaturated group, and each  $\text{R}_4$  is independently selected from  $\text{R}_3$ , hydrocarbon, or hydrogen. Primary, secondary, or tertiary amines can be used, but tertiary amines are preferred as they seem to produce better properties, and tertiary amines having three unsaturated groups are particularly preferred as they introduce more unsaturation into the polymer, resulting in better crosslinking and better resolution. Examples of tertiary amines include

triallylamine;  
trimethallylamine;  
dimethylallylamine;  
N-allyl-N-methylaniline;  
4-vinyl pyridine;  
dimethylaminoethylacrylate;  
dimethylaminoethylmethacrylate;  
diethylaminoethylmethacrylate; and  
diethylaminoethylacrylate.


Examples of secondary amines include

N-allylaniline;  
N-allyl cyclohexylamine; and  
diallylamine.


Examples of primary amines include  
allylamine;

amino ethylmethacrylate;  
4-allyl benzylamine; and  
amino ethylacrylate.

A preferred polyimide ammonium salt has the repeating units

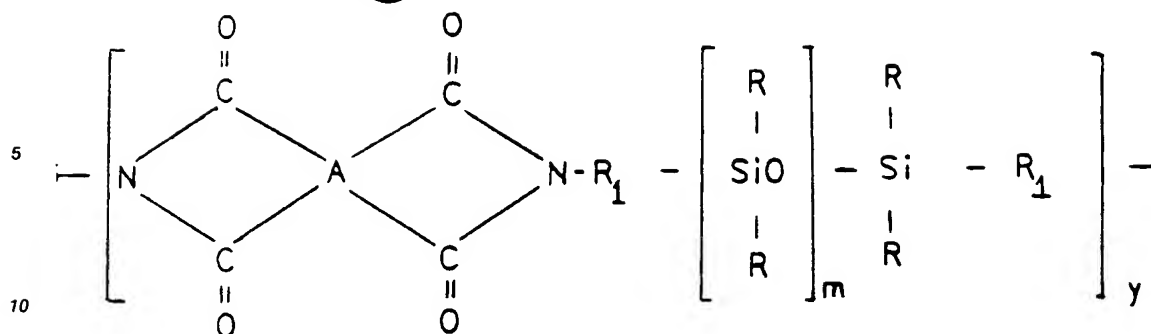

and

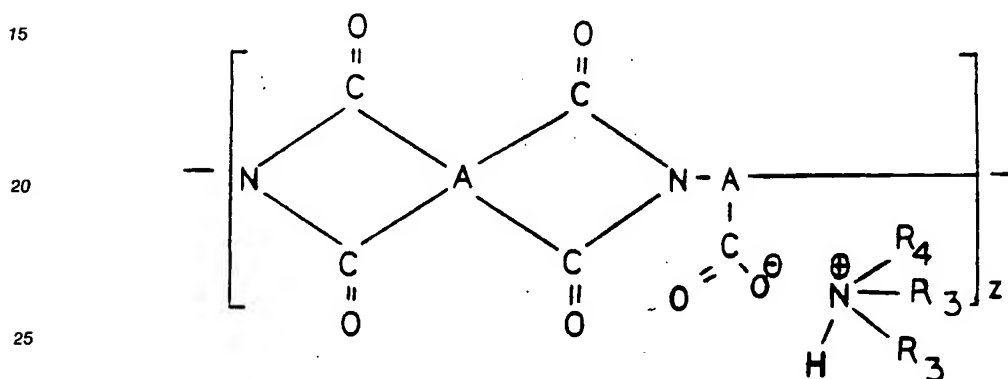

where y is 5 to 30 mole% of y + z.



30 While the polyimide ammonium salt can be crosslinked without a crosslinking agent, it is preferable to use a crosslinking agent to obtain faster and more complete crosslinking. A composition is preferably prepared of a solution of the polyimide ammonium salt and about 1 to about 30 weight% (based on polymer weight) of a crosslinking agent. Suitable crosslinking agents include trimethylol triacrylate, pentaerythritol triacrylate, pentaerythritol tetraacrylate, pentaerythritol tetramethacrylate, 1,1,1-trimethylolpropane triacrylate, 1,1,1-trimethylolpropane trimethacrylate, 1,1,1-trimethylolpropane trimethacrylate, tetraethylene glycol diacrylate, and tetraethylene glycol dimethacrylate. To incorporate more unsaturated bonds into a crosslinking molecule, the following novel crosslinking agents can be used:

40


45

50




55

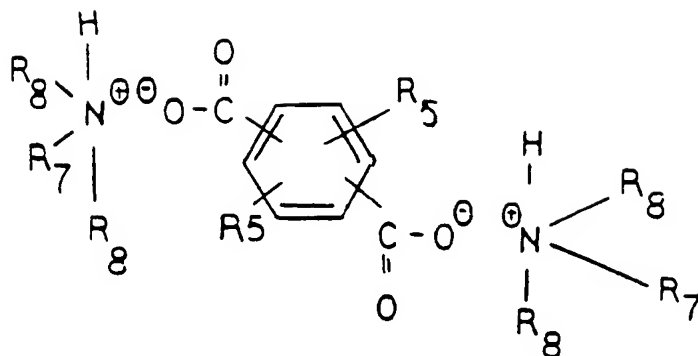

, and

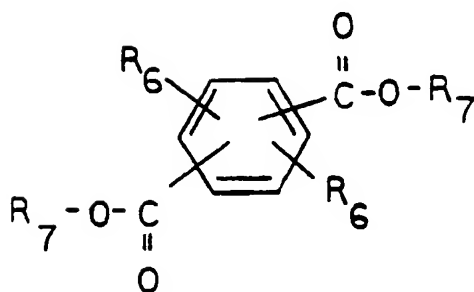

where

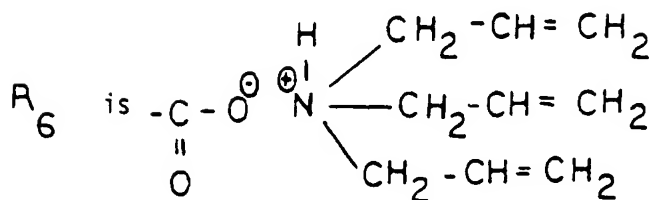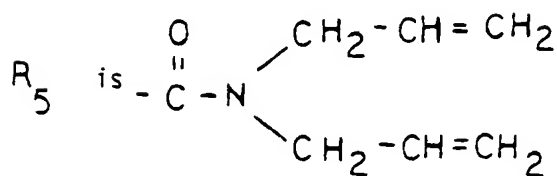

$R_8$  is alkyl to  $C_8$ , preferably methyl or ethyl, and

$R_9$  is H or  $CH_3$ .

The preparation of the above three novel crosslinking agents is given in Examples 4, 5, and 6, respectively.

To prepare a coating of the polyimide ammonium salt on a substrate, the composition is spread on the substrate and the solvent is evaporated. Those portions of the coating that one wishes to remain on the substrate are exposed to a actinic radiation (e.g., ultraviolet light), which crosslinks and insolubilizes the coating. The unexposed portions of the coating are washed away with a solvent. While the coatings of this invention are most suitable for use on semiconductor packaging, they can also be used to coat other substrates such as ceramic substrates, polymer films, and metals.

The following examples further illustrate this invention.

#### Example 1

To a 250 ml. 3 neck round bottom flask equipped with overhead stirrer and a Dean Stark trap was added 100 ml N-methyl pyrrolidone, 10 ml toluene, and 14.35 grams oxydiphthalic anhydride. The mixture was stirred and 5.64 grams of 3,5-diaminobenzoic acid was added. After stirring for 30 minutes, 5.01 grams of diaminopropyl terminated dimethyl siloxane oligomer having an average repeat unit of 5 ( $G_5$ ) was added. The mixture was stirred for 1 hour, 0.38 g of 1,4-diazabicyclo[2.2.2.] octane, and 5 ml toluene were added, and the mixture was heated to  $170^\circ\text{C}$  to remove water and toluene. After 90 minutes, the mixture was cooled to room temperature and poured onto water to precipitate the polymer. The slurry was filtered, the polymer reslurried in water, filtered, and dried. The polymer had an inherent viscosity of 0.35 and had 1.62 milliequivalents (meq) of acid per gram (theoretical value = 1.59 meq/gram).

#### Example 2

In similar fashion as Example 1, a polymer was obtained using 9.35 pbw (parts by weight) oxydiphthalic anhydride, 3.04 pbw 3,5-diaminobenzoic acid, and 2.48 pbw 1,3-bis(3-aminopropyl)-1,1,3,3-tetramethyldisiloxane- $(G_1)$ .

#### Example 3

In similar fashion as Example 1, a polymer without siloxane groups was prepared using 9.3 pbw oxydiphthalic anhydride, and 4.56 pbw 3,5-diaminobenzoic acid.

#### Example 4

A crosslinking agent effective in photosensitive formulations was prepared by completely dissolving 2.2 g of PMDA in 5 ml of NMP and cooling the solution to  $5$  to  $10^\circ\text{C}$  in an ice bath. To the solution was added dropwise 1.94 g of diallylamine and 3.7 g diethylaminoethyl methacrylate in 5 ml NMP over 30 to 60 minutes. The reaction was run for 4 hours. The solution was used in Examples 8 to 13, 17, and 18.

#### Example 5

A crosslinking agent effective in photosensitive formulations was prepared by cooling 2.2 g of PMDA dissolved in 5 ml of NMP to  $5$  to  $10^\circ\text{C}$  in an ice bath. During a one hour period, 1.94 g of diallylamine and 2.7 g of triallylamine in 5 ml of NMP were added dropwise. The reaction was run for 4 hours. The solution was used in Example 14.

#### Example 6

A crosslinking agent effective in photosensitive formulations was prepared by dissolving 2.2 g PMDA and 2.6 g of hydroxyethylmethacrylate in 5 ml NMP and cooling the solution in an ice bath. To the solution was added dropwise 2.7 g of triallylamine in 5 ml NMP over a one hour period and the reaction was run for 4 hours. The solution was used in Example 15.



## Examples 7 To 16

The polymer of Example 1 was dissolved in NMP to obtain a 20 wt% solution. To 2.5 g of this solution were added a molar equivalent of unsaturated amine, 0.03 pbw benzophenone, 0.015 pbw Michler's ketone, and an optional crosslinking agent.

## Example 17

The procedure described for Examples 7 - 16 was followed using the polymer prepared in Example 2.

## Example 18

The procedure described for Examples 7 - 16 was followed using the polymer prepared in Example 3.

The solutions were spun onto silicon wafers at 1500 rpm, soft baked for 2 to 3 minutes on an 80°C hot plate, exposed to UV light through a mask for 5 minutes, developed in a 2:1 vol:vol NMP:methanol solution, and rinsed with isopropanol. The pattern of the mask was observed.

The following table gives the results of Examples 7 to 18.

Example	Amine		Crosslinker Solution		Results
	pbw		pbw		
7	0.151	Diethylaminoethyl Methacrylate			Pattern Obtained
8	0.151	Diethylaminoethyl Methacrylate	0.08	Example 4	Pattern Obtained
9	0.086	Vinyl Pyridine	0.08	Example 4	Pattern Obtained
10	0.112	Triallylamine	0.08	Example 4	Pattern Obtained
11	0.046	Monoallylamine	0.08	Example 4	Pattern Obtained
12	0.079	Diallylamine	0.08	Example 4	Pattern Obtained
13	0.128	Dimethylaminoethyl Methacrylate	0.08	Example 4	Pattern Obtained
14	0.151	Diethylaminoethyl Methacrylate	0.08	Example 5	Pattern Obtained
15	0.151	Diethylaminoethyl Methacrylate	0.08	Example 6	Pattern Obtained
16	0.151	"	0.04	Pentaerythritol Tetraacrylate (Solid)	Pattern Obtained
17	0.151	"	0.08		Example 4 Pattern Obtained
18	0.151	"	0.08	Example 4	Pattern Obtained

## Claims

1. A polyimide ammonium salt comprising the reaction product of
  - (A) an aromatic polyimide having pendant carboxylic acid groups, said polyimide comprising the reaction product of diamine and aromatic dianhydride, where said diamine comprises aromatic carboxylic acid diamine having at least one carboxylic acid group; and
  - (B) an ethylenically unsaturated amine.
2. A polyimide ammonium salt according to Claim 1 wherein said aromatic dianhydride is selected from the group consisting of oxydiphthalic anhydride, pyromellitic dianhydride, 2,2'-bis (3,4-dicarboxyphenyl) hexafluoropropane dianhydride, 3,3',4,4'-benzophenone tetracarboxylic dianhydride, 3,3',4,4'-biphenyl tetracarboxylic dianhydride, and mixtures thereof.
3. A polyimide ammonium salt according to Claim 1 wherein about 10 to 50 mole% of said aromatic dianhydride is an aromatic dianhydride that contains silicone.

4. A polyimide ammonium salt according to Claim 1 wherein about 5 to about 30 mole% of said diamine is a diamine that contains silicone.


5. A polyimide ammonium salt according to Claim 1 wherein said ethylenically unsaturated amine is a tertiary amine.

6. A polyimide ammonium salt according to Claim 5 wherein said tertiary amine has three ethylenically unsaturated groups.

7. A polyimide ammonium salt according to Claim 6 wherein said tertiary amine is triallylamine.

8. A polyimide ammonium salt according to Claim 1 wherein about 10 to about 100 mole % of said diamine is said aromatic carboxylic acid diamine.


9. A polyimide ammonium salt according to Claim 1 wherein said aromatic carboxylic acid diamine has the formula

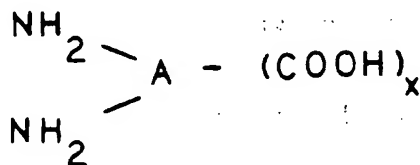

where x is 1, 2, or 3.


10. A polyimide ammonium salt according to Claim 9 wherein x is 1.

11. A polyimide ammonium salt according to Claim 10 wherein said aromatic carboxylic acid diamine has the formula




12. A polyimide ammonium salt according to Claim 11 wherein said aromatic carboxylic acid diamine is 3,5-diaminobenzoic acid.

13. A polyimide ammonium salt according to Claim 9 wherein said aromatic carboxylic acid diamine has the formula

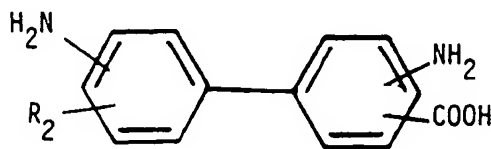

where  $R_2$  is H or COOH.


14. A polyimide ammonium salt according to Claim 9 wherein said aromatic carboxylic acid diamine has the formula




where  $R_2$  is H or COOH and B is CO,  $SO_2$ , S,  $C(CH_3)_2$ ,  $C(CF_3)_2$ , or  $CH_2$ .

15. A polyimide ammonium salt according to Claim 1 wherein said diamine includes up to 80 mole % of an aromatic diamine that does not contain silicone and does not have a carboxylic acid group.

16. A polyimide ammonium salt having the repeating units

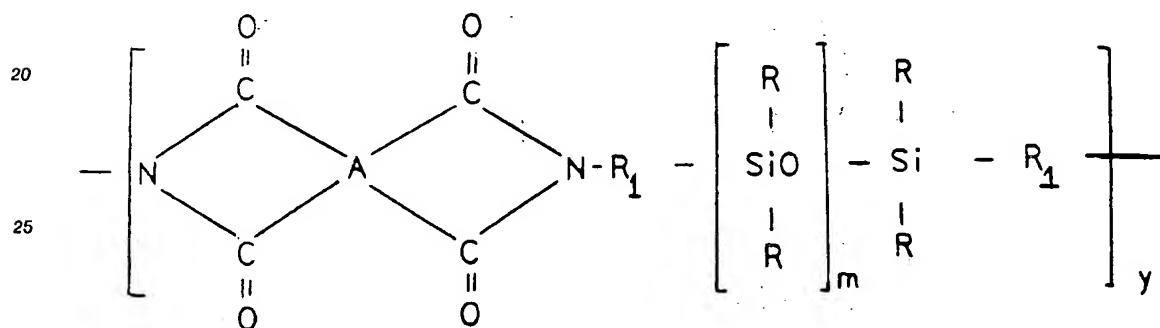

and

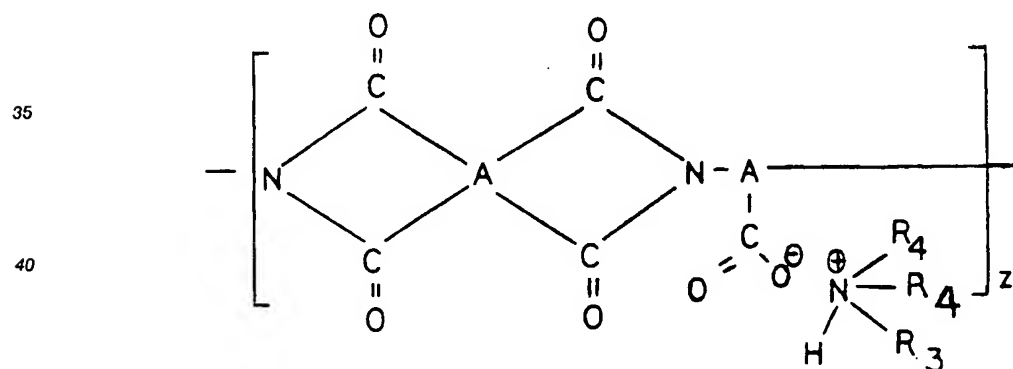


where each A is independently selected from an aromatic group, each R is independently selected from alkyl to  $C_8$ , alkenyl to  $C_8$ , and aryl to  $C_{10}$ , each  $R_1$  is a diradical independently selected from a substituted or unsubstituted aliphatic group having 1 to 12 carbon atoms or a substituted or unsubstituted aromatic group having 6 to 10 carbon atoms,  $R_3$  is an ethylenically unsaturated group,  $R_4$  is  $R_3$ , hydrocarbon, or hydrogen, m is 1 to 200, and y is 5 to 30 mole% of  $y + z$ .

17. A polyimide ammonium salt according to Claim 16 wherein  $R_1$  is  $(CH_2)_3$ , R is  $CH_3$ , and m is 1 to 20.


18. A method of making a polyimide ammonium salt comprising

- (A) preparing a polyimide having pendant carboxylic acid groups by reacting aromatic dianhydride with diamine, where said diamine comprises a carboxylic acid diamine having at least one carboxylic acid group;
- (B) reacting said pendant carboxylic acid groups with an ethylenically unsaturated amine.

19. A method according to Claim 18 wherein said polyimide ammonium salt contains the repeating units

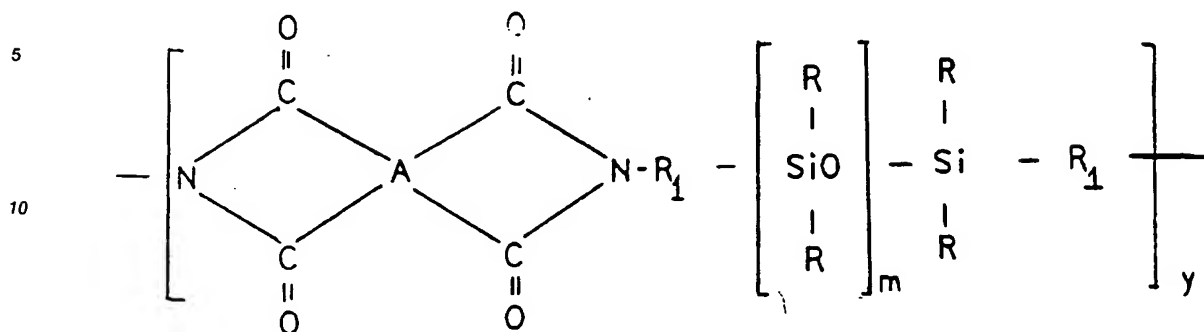

and

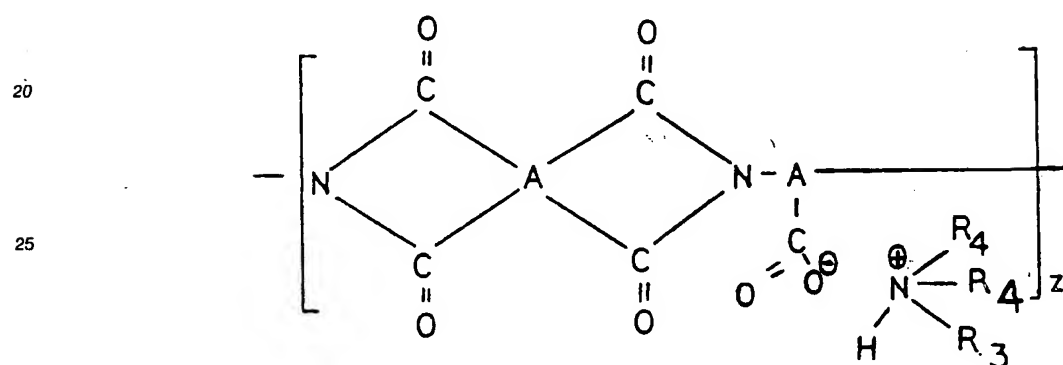



where each A is independently selected from an aromatic group, and each R is independently selected from alkyl to C<sub>8</sub>, alkenyl to C<sub>8</sub>, and aryl to C<sub>10</sub>, R<sub>1</sub> is a diradical independently selected from a substituted or unsubstituted aliphatic group having 1 to 12 carbon atoms or a substituted or unsubstituted aromatic group having 6 to 10 carbon atoms, R<sub>3</sub> is an ethylenically unsaturated group, R<sub>4</sub> is R<sub>3</sub>, hydrocarbon, or hydrogen, m is 0 to 200, and y is 5 to 30 mole% of y + z.

20. A composition comprising a solution of a polyimide ammonium salt in an organic solvent and about 1 to about 30 wt% of a crosslinking agent.


21. A method of coating a substrate with a polyimide ammonium salt comprising

- (A) forming a composition of a polyimide ammonium salt according to Claim 19;
- (B) spreading said composition on said substrate;
- (C) evaporating said solvent to form a coating;
- (D) exposing at least some of said coating to actinic radiation to crosslink and insolubilize the portions so exposed; and
- (E) washing the unexposed portions away by dissolving them in an organic solvent.




22. The compounds

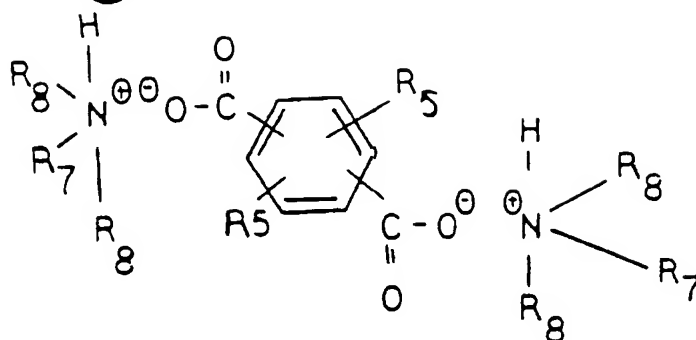

, and

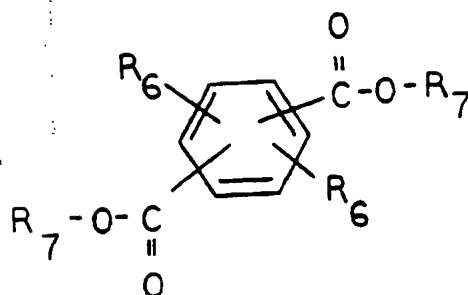

where

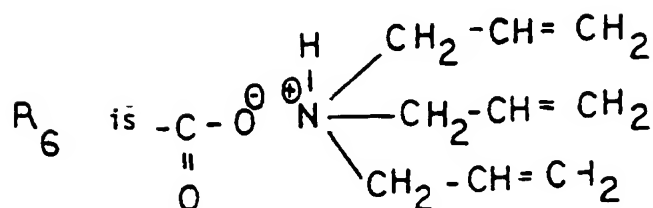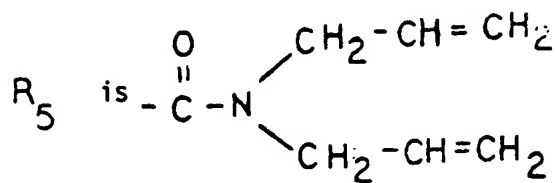

$R_8$  is alkyl to  $C_8$ , preferably methyl or ethyl, and  
 $R_9$  is H or  $CH_3$ .

5

10

15

20

25

30

35

40

45

50

55



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number:

**0 547 555 A3**

(12)

## EUROPEAN PATENT APPLICATION

(21) Application number: **92121315.3**

(51) Int. Cl.<sup>5</sup>: **C08G 73/10, C07C 233/65,  
C07C 69/767, C07C 211/63**

(22) Date of filing: **15.12.92**

(30) Priority: **16.12.91 US 807348**

(43) Date of publication of application:  
**23.06.93 Bulletin 93/25**

(84) Designated Contracting States:  
**BE DE ES FR GB IT NL**

(88) Date of deferred publication of the search report:  
**01.12.93 Bulletin 93/48**

(71) Applicant: **OCCIDENTAL CHEMICAL  
CORPORATION  
2801 Long Road  
Grand Island New York 14072-1244(US)**

(72) Inventor: **Choi, J. O.  
4291 Chestnut Ridge Road,  
Apt. No. 1  
Amherst, NY 14228(US)  
Inventor: Tyrell, John  
83 East Pinelake Drive  
Williamsville, New York 14221(US)**

(74) Representative: **VOSSIUS & PARTNER  
P.O. Box 86 07 67  
D-81634 München (DE)**

(54) **Photocrosslinkable polyimide ammonia salts.**

(57) Disclosed is a polyimide ammonium salt comprising the reaction product of an ethylenically unsaturated amine with an aromatic polyimide having pendant carboxylic acid groups, said polyimide comprising the reaction product of diamine and aromatic dianhydride, where the diamine comprises an aromatic carboxylic acid diamine having at least one carboxylic acid. A substrate can be coated with the polyimide ammonium salt by forming a composition of a crosslinking agent and a solution of the polyimide salt in an organic solvent, spreading the composition on the substrate, evaporating the solvent to form a coating, exposing at least some of the coating to actinic radiation to crosslink and insolubilize the exposed portions of the coating, and washing the unexposed portions away by dissolving them in an organic solvent.

**EP 0 547 555 A3**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number

EP 92 12 1315

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
A	EP-A-0 119 719 (TORAY INDUSTRIES) * claims *	1-21	C08G73/10 C07C233/65 C07C69/767 C07C211/63
A	DE-A-2 914 619 (TORAY INDUSTRIES) * claims 1-3,7-13 *	1,5-7	
A	US-A-3 533 997 (R. J. ANGELO) * claims 2-4 *	1-16	
A	EP-A-0 459 809 (UBE INDUSTRIES) * claims 1,6,7 *	1,8-10, 16	
A	EP-A-0 284 803 (OCCIDENTAL CHEMICAL CORP.)  * page 12, line 31 - page 14, line 21; claims 1,6-9,22-28 *	1-4, 8-14,16, 18	
A	EP-A-0 328 027 (OCCIDENTAL CHEMICAL CORP.)  * page 12, line 13 - page 15, line 42; claims 1,16 *	1-4, 8-14,16, 18	TECHNICAL FIELDS SEARCHED (Int. Cl.5)
A	FR-A-2 377 404 (RAYCHEM CORP.) * claims; table 1 *	22	C08G C08F C07C
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 24 SEPTEMBER 1993	Examiner BOEKER R.
<b>CATEGORY OF CITED DOCUMENTS</b> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document  T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons  & : member of the same patent family, corresponding document			



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**